



| | | | |
|--|-----------------|-----------------------------------|--------------------------------|
| Set Temperature Range | 5-35°C, 41-95°F | Frost Protection (7°C - 17°C) | Y |
| Positive & Inverted Display Options | Y | Mesh Networking Facility | Y |
| Non-Programmable Mode | Y | °C / °F Option | Y |
| 5/2 Day Programming Mode | Y | Built In Air Sensor | Y |
| 7 Day Programming Mode | Y | Remote Air Sensing Mode | Y |
| 24 Hour Mode | Y | Floor Sensing Mode | Y |
| Number of Heating Levels (6 with neoHub) | 4 or 6 | Remote Probe Included | N |
| Advance Function | Y | Floor Temp Limit Protection | Y |
| Optimum Start | Y | Cooling | N |
| Number of Switching Times (Timer mode) | 4 | Max Switching Current | 3A |
| Holiday Function | Y | Accuracy +/- | 1°C |
| Keylock Function | Y | Adjustable Switching Differential | 0.5°C - 3°C |
| Temperature Hold Function | Y | Supply | 230V AC |
| Temperature Override | Y | Installed Dimensions | 107 x 86 x 15mm (L,H,D) |
| Temperature Override Limit | Y | Weight | 188g |
| Output Delay | Y | | |

Feature Table - Thermostat / Combined Modes


| FEATURE | DESCRIPTION | SETTING |
|---------|------------------------------|--|
| 01 | Pairing | Used to add zone to the neoHub |
| 02 | Switching Differential | 00.5 = 0.5°C (Default) 01 = 1.0°C 02 = 2.0°C 03 = 3.0°C |
| 03 | Frost Protection Temperature | 05° - 17°C (12°C = Default) |
| 04 | Output Delay | 00 - 15 Minutes (00 = Default) |
| 05 | Up/Down Temperature Limit | 00° - 10°C (00 = Default) |
| 06 | Sensor Selection | 00 = Built in Sensor (Default) 01 = Remote Air Sensor 02 = Floor Sensor Only 03 = Built in & Floor Sensor 04 = Remote Air & Floor Sensor |
| 07 | Floor Temperature Limit | 20°C - 45°C (28°C = Default) |
| 08 | Optimum Start | 00 - 05 Hours (00 = Default) |
| 09 | Rate of Change | Minutes to raise by 1°C |

| FEATURE | DESCRIPTION | SETTING |
|---------|---|--|
| 10 | Not used on this model | -- |
| 11 | Not used on this model | -- |
| 12 | Program Mode | 00 = Non - Programmable 01 = Weekday/Weekend (Default) 02 = 7 Day Programming 03 = 24 Hour Mode |
| 13 | Temperature Format | 00 = °C, 01 = °F (00 = Default) |
| 14 | Backlight dimming (Carbon Models Only). | 00 = Medium 01 = Low |

Feature Table - Timer Mode

| FEATURE | DESCRIPTION | SETTING |
|---------|---|--|
| 01 | Pairing | Used to add zone to the neoHub |
| 02 | Program Mode | 00 = Non - Programmable 01 = Weekday/Weekend (Default) 02 = 7 Day Programming 03 = 24 Hour Mode |
| 03 | Backlight dimming (Carbon Models Only). | 00 = Medium 01 = Low |

Product Dimensions (mm) & Wiring Specification

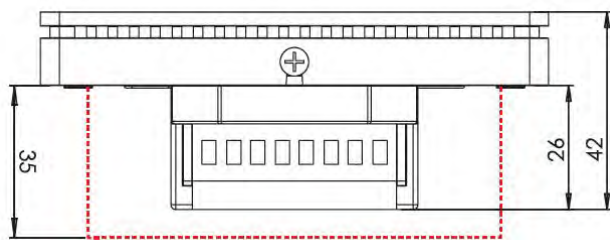

Note: Fits standard 35mm depth back box

